



NOTES:

1. USE OF SIDEWALK CHASE SHALL BE SPECIFICALLY APPROVED BY DIRECTOR OF PUBLIC WORKS.
2. CHASE WIDTH LESS THAN 16 INCHES USE 1/2 INCH PLATE. CHASE WIDTH GREATER THAN 16 INCHES USE 5/8 INCH PLATE.
3. SIDEWALK CHASE CONCRETE SHALL BE PLACED MONOLITHICALLY.
4. MAXIMUM WIDTH OF 20 INCHES FOR CHASE DRAIN.

FLOW 1/4" PER FOOT (MIN)

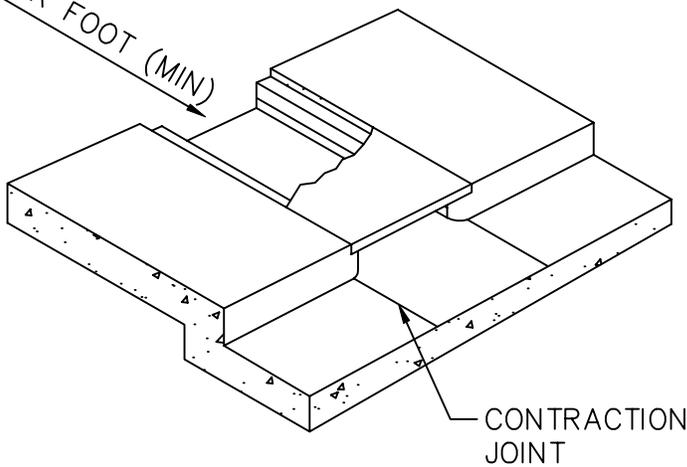


#3 REBAR, 6" LONG
WELDED TO TEE AT
18" ON CENTER EACH
SIDE (3/8" ANCHOR
BOLT MAY BE USED)

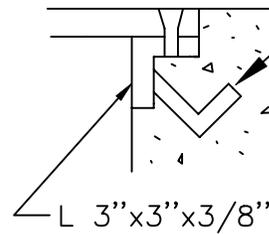

5/16" COUNTERSUNK BRASS SCREWS,
18" ON CENTER INTO THREADED ANGLE IRON

NON-SLIP
RAISED-PATTERN
STEEL GALVANIZED
PLATE NOT TO
EXCEED 26" WIDE

6" MIN
WALK DEPTH

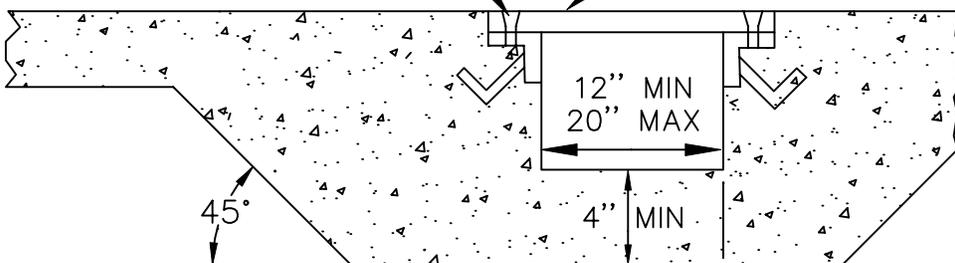

SECTION A - A

8" MIN

DRAWN BY: JSH

CHECKED BY: RJH

APPROVED BY:
DIRECTOR OF PUBLIC WORKS

CITY OF BOULDER, COLORADO

CHASE DRAIN
CURBWALK

ISSUED: JULY 2, 1998
REVISED: OCT. 17, 2000

DRAWING NO.

2.31